QG series

QG65D CANopen Standard accuracy series

QG65D-KIXv-360-CAN-C(F)M-UL

Dynamic Inclination sensor
1 axis vertical mounting

Programmable device
Interface: CANopen

Parameters programmable
by DIS configurator and
CANopen object dictionary

Measuring range
±180°



	General specifications 12820, 12823, v20241115
Housing	Reinforced plastic injection molded (Faradex DS, black, EMI shielded by stainless steel fiber in PC)
Dimensions (indicative)	60x50x27 mm
Mounting	Included: 4x M5x25 mm zinc plated steel pozidrive pan head screws, self-tapping (PZ DIN7500CZ) Mounting on flat surface only. Screw with care
Ingress Protection (IEC 60529)	IP67, IP69K (with IP69K mating connector)
Relative humidity	0 - 95% (non condensing, housing fully potted)
Weight	approx. 110 gram
Supply voltage	10 - 32 V dc
Polarity protection	Yes
Current consumption	50mA typ. For CFM models (daisy-chained CANbus): max. current internal T-junction: 2.5A
Operating temperature	-40 .. +80 °C
Storage temperature	-40 .. +85 °C
Measuring range	±180°
Centering function	Yes (CANout 0 = 0°), range: 360°
Frequency response (-3dB)	0 - 50 Hz, Max angle rate 500°/s
Accuracy (overall @20°C)	0,15° typ. (static), 0,8° typ. (dynamic)
Offset error	± 0,05° typ. (± 0,1° 2σ) after centering
Non linearity	Static: ± 0.1° typ., ± 0,15° 2σ, ± 0.2° max, Dynamic: ± 0,8° typ. (*) (**)
Sensitivity error	not applicable. Repeatability 0,1°
Resolution	0,01°
Temperature coefficient	T>0°C: 0.015°/K typ. en T<0°C: 0.03°/K typ.
Max mechanical shock	10,000g (max 0,2ms, non-repetitive)
CAN interface (physical layer)	According to ISO 11898-1 & ISO 11898-2 (CAN 2.0 A/B), Short circuit protected
CANopen application layer and communication profile	CANopen, CiA301 V4.2.0 & EN 50325-4 + Device Profile CiA410 DSP 2.0.0 for inclinometers
Baud rate Node ID TPDO Event timer fot TPDO1 Sync mode Heartbeat Programming options Output format Application profiles Modes of operation Internal CANbus termination	250 kbit/s (default, range 10/20/50/100/125/250/500/800/1000 kbit/s 01h (range: 01h - 7Fh) For Node ID=01h: TPDO1: 181h, TPDO2: 281h TPDO1: 10 - 500 ms (default: 100 ms) On/off (default: off) On/off (default: on, 2s) Baudrate, Node ID, Event time, Sync mode, Heartbeat, Output format, CANbus termination, filtering Integer: -17999 to +18000 (TPDO1:data byte 2,1) 0/1/2/3 (factory default: profile 1) Event mode, Sync-mode. Default: auto-startup Event mode 120 Ohm on/off (default: off)
Boot time	< 0.5 s
Programming options	by Optional DIS Configurator set CAN and CANopen object dictionary (CAN parameters, application profiles, filtering)


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

QG65D-KIXv-360-CAN-C(F)M-UL

CANoutput = 100*α

Zeroing can be done to eliminate mounting offsets.

Transfer characteristic

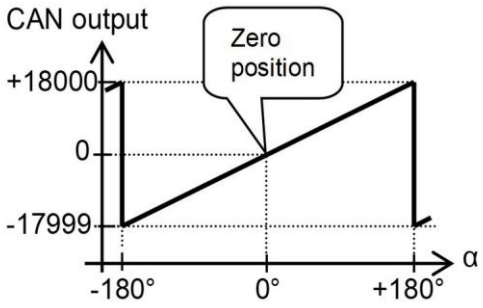


Rotation in vertical plane.

Lateral tilt sensitivity error:
< ± 0,03°/° lateral tilt (typ.)
Max. lateral tilt: 45°

Drawn in the default 0° sensor orientation position
Zeroing can be done to change the sensor orientation at 0° point

Measurement orientation

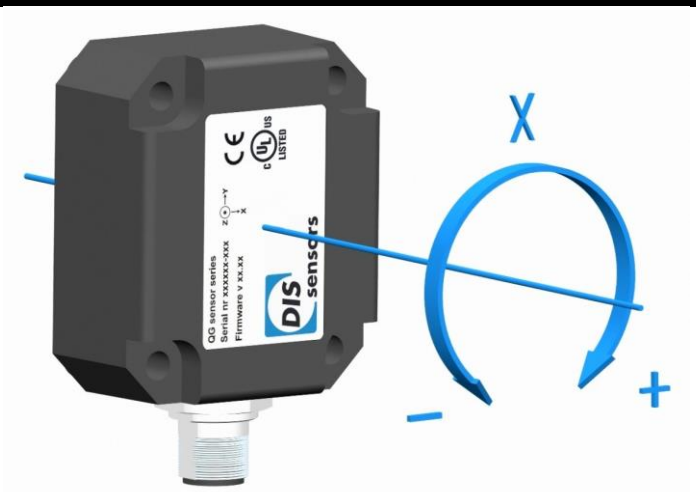

Connection


Connectivity (cable length ±10%)

Male only or Male & Female (internal T-junction) M12 connector (5 pins, A-coding)
(CiA303 V1.8.0) (Brass Nickel coated, contacts copper alloy)

A CANbus always has to be terminated properly according to customers bus topology and general CAN rules.
The sensor has an on-board internal 120 Ohm CANbus termination resistor that can be switched on by the CANopen dictionary (default: off).
Alternatively an external M12 termination resistor can be connected when using a Male & Female (internal T-junction) model.
External M12 termination resistors and T-connectors are available as accessoire, see DIS website.


Wire / pin coding

Pin 1:	Shield
Pin 2:	Vcc
Pin 3:	Gnd & CAN_GND
Pin 4:	CAN_H
Pin 5:	CAN_L



Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Mechanical dimensions (indicative only)

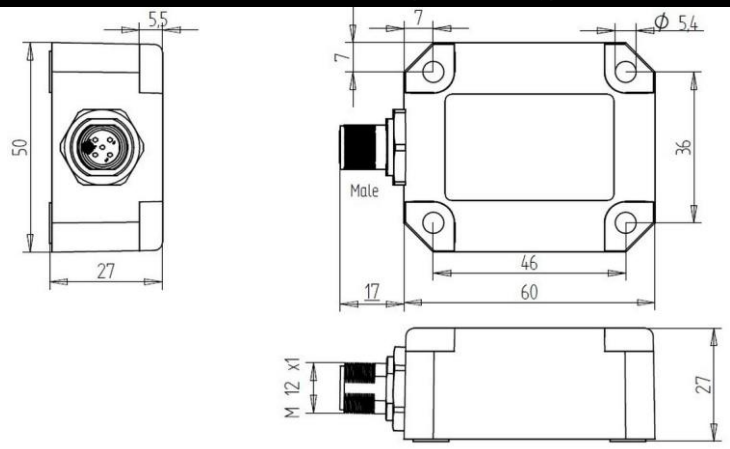

E4ready, UL, CAN-manual, EDS-file, Ordering codes

Before using this device, please read this datasheet, the Manual and the Declaration of Conformity carefully (download from dis-sensors.com)

This product is E4ready and meets Automotive EMC requirements

Connect this sensor only to an approved CAN controller which must have a grounded shield. Alternativelly, connect the sensor housing to a grounded shield. All mentioned EMC standards that are met (see Declaration of Conformity) have been done with the housing connected to a grounded shield.

QG series sensors are intended to measure inclination/acceleration/tilt. Flawless function (acc. spec.) is ensured only when used within specifications. This device is not a safety component acc. to EU Machine Directive (ISO13849). For full redundancy two devices can be used. Modifications or non-approved use will result in loss of warranty and void any claims against the manufacturer.

UL & c-UL listed product (File number E312057, UL508 standards UL60947-5-2 & CSA-C22,2 No. 14)
Product Identity / Category Code Number (CCN): Industrial Control Equipment / NRKH & NRKH7
Enclosure rating: type 1, Ambient temperature: max 80 °C (see also datasheet, lowest value applies)
Electrical ratings: Intended to be used with a Class 2 power source in accordance with UL1310,
max. input Voltage 32V dc (see also datasheet, lowest value applies), max. current 200mA
Accessory Cable Assembly: Any UL-listed (CYJV/7) mating connector with mechanical locking, wire thickness of at least 30 AWG (0,05 mm²), recommended ≤23 AWG (≥0,25 mm²)

(*) Accuracy within spec : approx.. 30sec after boot-up.
(**) Dynamic accuracy figures based on Robot tests, robot performing actions representative for general mobile machine movements

Optional: for accurate mounting two factory mounted positioning pins can be mounted (Ø4mm) replacing 2x M5x25 mm.

As this device is accelerometer-based the sensor is inherent sensitive for accelerations/vibrations.
The majority of these dynamic effects will be eliminated by the on-board gyroscope.
The on-board gyroscope and Kalmann filtering are special designed to prevent the inclinometer to become significant inaccurate in dynamic situations.The sensor has pre-programmed Kalmann algorithms ('Application profiles') that can be selected via the CANbus
Application specific testing must be carried out to check which compensation algorithm fits the application best, and whether this sensor will fulfil customers requirements.

A CAN-manual and EDS-file (CiA306 V1.3.0) can be downloaded from the website (Type H)

Ordering codes:
M12 Male: QG65D-KIXv-360-CAN-CM-UL, 12820
M12 Male & Female: QG65D-KIXv-360-CAN-CFM-UL, 12823

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000