QR series


QR40EMN-360HB-I-CM-UL

Absolute rotary encoder (contactless)

Output
4 - 20 mA


Supply voltage
10 - 32 Vdc

Measuring range
360°

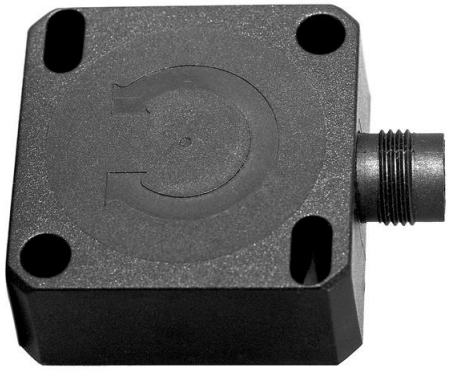

c UL us LISTED E312057

CE


	General specifications 12338, v20200323
Housing	Reinforced plastic injection molded (Celanex 2300 GV3/30 - glass filled PBT, black)
Dimensions (indicative)	40x40x17 mm
Mounting	Included: 2x M4x25 stainless steel pozidrive pan head screws, self-tapping (PZ DIN7500CZ)
Ingress Protection (IEC 60529)	IP67, IP69K
Relative Humidity	0 - 95% (non condensing, fully potted)
Weight	approx 50 gr
Magnet type	11,2 x 5,5 x 8 mm Neodymium/N35/nickel coated/remanention 1,2 T
Magnet distance to sensor	0 to 10 mm, magnet at front side
Max. radial magnet misalignment	1 mm Radial Off Axis (< 0,3 mm for minimum non-linearity)
Direction of magnetization	Axial in 8 mm (Northpole marked)
Supply voltage	10 - 32 Vdc
Polarity protection	Yes
Current consumption	≤ 25 mA (excluding output signal)
Operating temperature	-40 to 85°C
Storage temperature	-40 to 85°C
Measuring range	360°
Programmable center position	No
Accuracy	
Resolution	11 bit over 360° (min. step 0,18°)
Sensitivity error	±0.5% typ. (@20°C), ±1% typ. (full Temp. range)
Offset error	Magnet + Sensor: <3° typ. (with perfect external magnet positioning)
Non linearity	< ± 1° in magnet alignment range
Repeatability	0,26°
Response time	< 4 ms
Max speed	100 rpm
Output signal	4 - 20 mA
Short circuit protection	Yes (T<55°C), Max 10 s (T>55°C)
Output load resistor	Rload ≤ 50*Vs - 250 [Ω] (Eg: Vs = 24 V: Rload ≤ 950 Ω)
Connection (length ±10%)	M12 5p male connector (Glass fibre reinforced grade, contacts CuZn pre-nickeled galv. Au)
Pinout M12 connector	Pin 1: + Supply voltage Pin 2: not connected Pin 3: Gnd Pin 4: Output Pin 5: not connected 

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000


QR40EMN-360HB-I-CM-UL

Output approx. 22mA when magnetic field outside specifications

Transfer characteristic

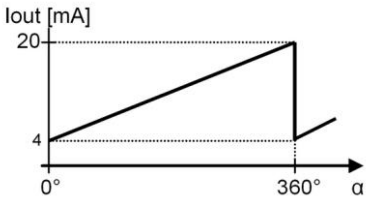

Dimensions (indicative only)

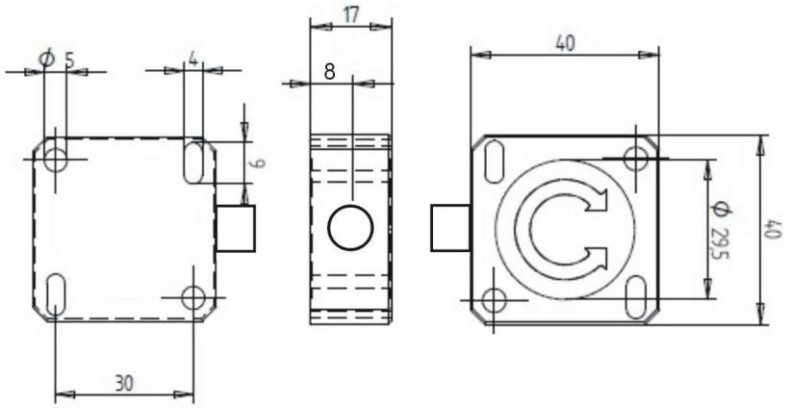

Intended use & UL


Intended use:
QR series sensors are intended to measure rotation after installing in machines, equipment and systems. Flawless function in accordance with the specifications is ensured only when the device is used within its specifications.
This device is not a safety component according to the EU Machine Directive (ISO13849).
Modifications or non-approved use are not permitted and will result in loss of warranty and void any claims against the manufacturer.

UL:
UL certificate: UL File number: E312057
UL & c-UL listed product (standards UL60947-5-2 & CSA-C22,2 No. 14)
Product Identity / Category Code Number (CCN): Industrial Control Equipment / NRKH & NRKH7
Enclosure / Temperature rating: Enclosure type 1 / Temperature -40° . .+85°C
Electrical rating: Intended to be used with a Class 2 power source in accordance with UL1310
Electrical ratings: max. input Voltage 32V dc, max. current 50mA

Magnet orientation

Magnet drawn in α=0° position.

While rotating the magnet clockwise α increases.
The magnet's north pole (N) is indicated.

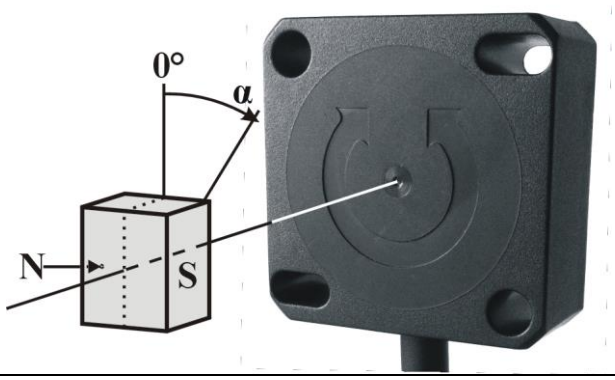

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000