QG series

QG40N-series

QG40N-KIXv-170-ASP-CM-UL

Tilt switch

1 axis vertical mounting

Programmable device
Output: PNP

Switch points programmable
between ±1° and ±170°

Measuring range
Factory defaults:
±90° & ± 170°



	General specifications 12262B, v20241216
Housing	Plastic injection molded housing (Arnite T06 202 PBT black)
Dimensions (indicative)	40x40x25 mm
Mounting	Included: 2x M3x25 mm zinc plated steel pozidrive pan head screws, self-tapping (PZ DIN 7500CZ) Mounting on flat surface only. Screw with care
Ingress Protection (IEC 60529)	IP67, IP69K (with IP69K mating connector)
Relative humidity	0 - 95% (non condensing, housing fully potted)
Weight	approx. 45 gram
Supply voltage	6 - 30 V dc
Polarity protection	Yes
Current consumption	≤ 25 mA
Operating temperature	-40 .. +60 °C
Storage temperature	-40 .. +85 °C
Measuring range	Factory defaults: ±90° & ± 170°
Centering function	Yes (0°), range: 360°
Frequency response (-3dB)	0 - 0,7 Hz
Accuracy (overall @20°C)	0,3° typ. (0,5° max)
Non linearity	not applicable
Resolution	0,1°
Temperature coefficient	± 0,04°/K typ.
Max mechanical shock	10.000g
Output	dual PNP
Output load	2x 500 mA continuously, Temperature protected, protected against back EMF
Short circuit protection	Yes, continously
Boot time	< 100 ms
Programming options	by optional QG40N-configurator (switch points, delay times, filtering)


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

QG40N-KIXv-170-ASP-CM-UL

2 independent PNP outputs:
- Programmable switchpoints ±S (optional QG40N Configurator)
- Operation zone: conducting
- Critical zone: non-conducting
- Unpowered sensor: non-conducting


Factory defaults:
- Switchpoint ±S output 1: ±90°
- Switchpoint ±S output 2: ±170°
- hysteresis: 0,5°
- operation ► critical delay : 0,5 s
- critical ► operation delay : 1 s

Transfer characteristic

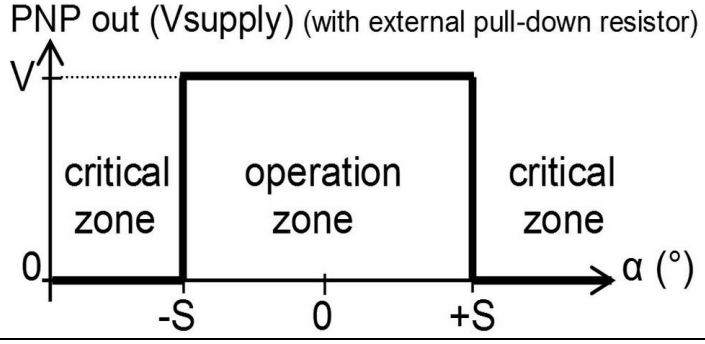

The default 0° position is when the sensor is mounted vertically (M12 downwards) and no acceleration is applied.
Zeroing: eliminate mech. offsets
Connect zeroing input to ground (>0,5sec) within 1 min. after power up. Normally the zeroing input should be left unconnected.
Zeroing is possible at any position in vertical plane.

Measurement orientation

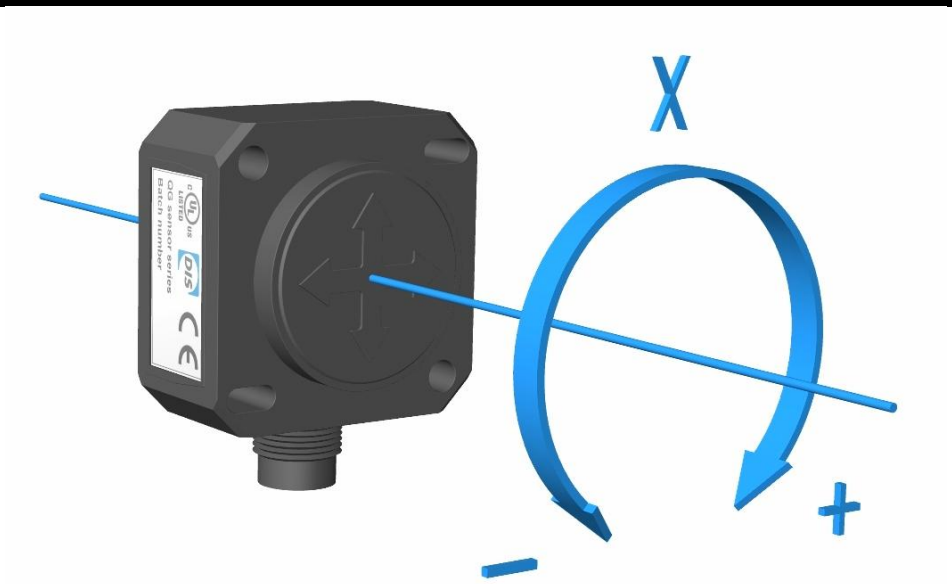


Connectivity (cable length ±10%)

Connection

M12 5p male connector (Glass fibre reinforced grade, contacts CuZn pre-nickeled galv. Au)

Wire / pin coding

Pin 1:	+ Supply Voltage
Pin 2:	output 2
Pin 3:	Gnd
Pin 4:	output 1
Pin 5:	zeroing



If connected with M12 F (accessory sold by DIS):

Brown:	+ Supply Voltage
White:	output 2
Blue:	Gnd
Black:	output 1
Green/yellow:	zeroing

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

	Mechanical dimensions (indicative only)
	@

	Intended use, UL, Remarks
	QG series sensors are intended to measure inclination, acceleration or tilt angle after installing in machines, equipment and systems. Flawless function in accordance with the specifications is ensured only when the device is used within its specifications. This device is not a safety component according to the EU Machine Directive (ISO13849). For full redundancy two devices can be used in the application. Modifications or non-approved use are not permitted and will result in loss of warranty and void any claims against the manufacturer. UL & c-UL listed product (File number E312057, UL508 standards UL60947-5-2 & CSA-C22,2 No. 14) Product Identity / Category Code Number (CCN): Industrial Control Equipment / NRKH & NRKH7 Enclosure rating: type 1, Ambient temperature: max 80 °C (see also datasheet, lowest value applies) Electrical ratings: Intended to be used with a Class 2 power source in accordance with UL1310, max. input Voltage 32V dc (see also datasheet, lowest value applies), max. current 200mA Accessory Cable Assembly: Any UL-listed (CYJV/7) mating connector with mechanical locking, wire thickness of at least 30 AWG (0,05 mm²), recommended ≤23 AWG (≥0,25 mm²) As this device is accelerometer-based the sensor is inherent sensitive for accelerations/vibrations. Application specific testing must be carried out to check whether this sensor will fulfil your requirements.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000